

Pingel® Electric Speed Shifter kit for 2006 H-D VRSCSE2 V-ROD Designed for Street Use #77802 Installation Instructions

***Read all instructions thoroughly, look at photos and all components before attempting installation.
This product is not designed or intended to be used as an assistive device for any particular disability.***


All the components of this Electric Speed Shifter Kit have been assembled and tested as a unit before leaving our factory and have been found to be in working order at the time of shipping. Installation of this kit requires detailed knowledge of the motorcycle model, its electronics and mechanics. It is assumed that the installer has access to the proper tools and a working knowledge of them, test equipment (such as a volt meter), and factory service manuals. The following instructions must be read in their entirety and any questions should be answered prior to attempting installation. Incorrect installation will result in damage to Electric Speed Shifter components. If after reading the instructions you do not feel comfortable installing the kit, please find a qualified technician to do the installation. Installation time is 2-3 hours.

Disconnect negative battery cable before attempting any work on motorcycle.

INSTALLATION OF DUAL BUTTON HANDLEBAR CONTROL:

Install the dual button handlebar control bracket over the handgrip as close to the switch housing as possible. This handlebar control bracket is set up to route the wires externally, but may also have its wires routed internally through the handlebars. This is accomplished by feeding the black cable up to the hole on the center of the bracket and then through a hole in the handlebars and handgrip.

Route the wires from the dual button handlebar control bracket neatly along handlebar into the speedometer/tachometer area or inside the handlebar into the speedometer/tachometer area. From there run the wire assembly under the frame towards the battery. Alongside the battery is the approximate location that the control module will be mounted. Make sure to secure the wires along their routing with wire ties provided. Excess wire can be coiled and hidden in the battery area.

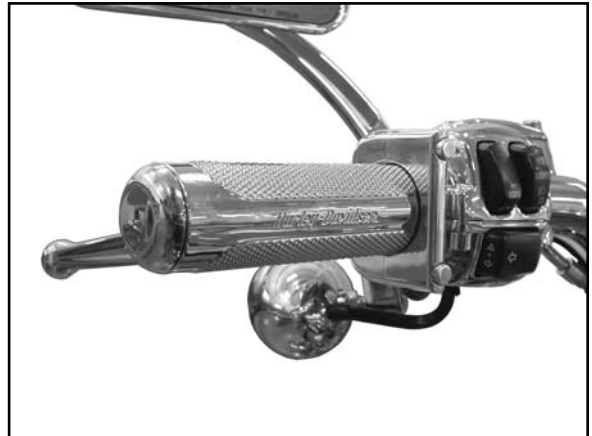

INSTALLATION OF CONTROL MODULE AND WIRE HARNESS:

Mounting location of the control module is alongside the battery. Note: the control module is supplied with Velcro for the bottom of the box to secure it.

The wire assembly previously run from the handlebar control will now come down and be connected to the control module. Note that there is a large round 4-pin connector, a small round 4-pin connector and a large round 3-pin connector. The handlebar connector has the small round 4 pins and should be connected to the appropriate male receptacle on the control module.

The large round 4-pin connector coming from the control module should be connected to the large 4-pin connector from the fused wire harness. The small round 3-pin connector on the fused wire harness is used for the electronic engine kill module. There are 3 loose wires coming from the fused wire harness. The black (negative) and large red (positive) go directly to the battery, the small red is for switched 12v positive power. We have found that on all of our H-D motorcycles, the orange wire with the white stripe is a switched 12v power source, but you will need to consult the service manual for your motorcycle model to be certain you are connecting to the proper wire. The small red lead can be connected to any lead on the motorcycle that is switched 12v positive power. Cut the small red wire to proper length and use the blue quick tab connector supplied to make this connection or preferably solder these wires to make the connection. The large red and black battery wires can also be cut to proper length, and then solder on the ring terminals supplied. Now attach the soldered on ring terminals to the battery posts, black to the negative and large red to the positive. The electronic engine kill module is also mounted alongside the battery. See the instruction sheet that is included with the electronic engine kill module.

INSTALLATION OF ELECTRIC SHIFT CYLINDER:

A steel shift cylinder support bracket (A in figure 1) with half of the Pingel shift cylinder clamp is mounted to the frame. Remove the clamp from this assembly so the steel support bracket can be painted; note the order of assembly and do not lose any parts especially the thin shim. Use a pencil to trace an outline of the large washer on each side of the bracket. Mask this area before painting. Failure to mask this area may result in improper shifter operation. Remove the clamp from this assembly so the steel support bracket can be painted. Do not remove any of the grease from the bushings; it is required for smooth operation. After painting, reinstall the clamp half using the supplied thread locker (make certain it is installed exactly as it was prior to removal). The support bracket mounts where the left side lower and upper frames connect. Remove the stock bolts and install the steel shift cylinder support bracket using the two 10mm x 75mm stainless socket head cap screws supplied, as shown in Figure 1.

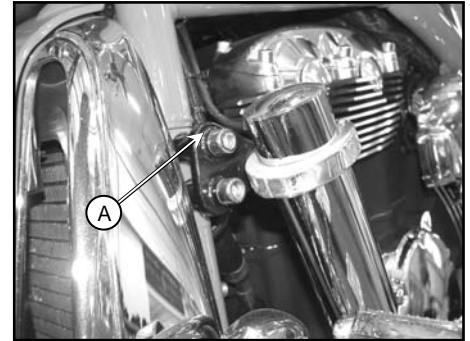


Figure 1

The Pingel shift lever bracket is installed by attaching it to the stock shift lever. Attach the Pingel shift lever bracket by putting the long piece with PINGEL engraved in it (A in figure 2) on the backside of the stock shift lever making sure the island on the Pingel shift lever bracket fits into the gap in the stock shift lever as seen in figure 2. Attach the mounting plate (B in figure 2) to the shift lever bracket using the two 1/4- 20 x 1" stainless button head socket cap screws supplied, use thread locker on the threads and tighten securely.

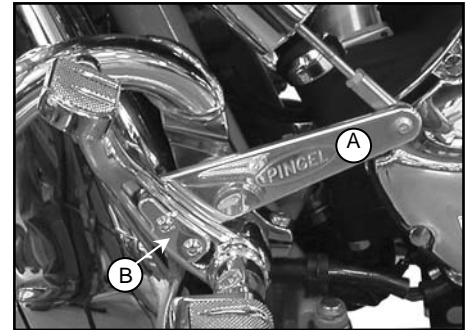


Figure 2

Install the electric shift cylinder onto the shift cylinder support bracket using the Pingel clamp and (2) 1/4-20 x 3/4" socket head cap screws as shown if Figure 1. Tighten these bolts for now, but adjustment will be needed later. The rod end on the shift cylinder should be able to go past the point of mounting in each direction sideways. The point of mounting is that flat surface upon which the rod end bolts to the shift lever bracket allowing for the thin flat 1/4" washer(s), if needed (four are supplied, use as many as required to achieve proper alignment). It is imperative that there is no side pressure or tension on the electric shift cylinder shaft when it meets its flat surface upon the Pingel shift peg bracket when it is bolted as this would take away valuable power from the electric shift cylinder resulting in binding and missed shifts. If the rod end does not line up correctly, you can either add another thin 1/4" flat washer to the existing washers to move the rod end away from the shift peg bracket, or remove one or more of the thin flat 1/4" washers to move the rod end closer to the shift peg bracket. Install the 1/4-28 x 1" button head socket cap screw through the Pingel shift lever bracket, the 1/4" washer(s) and through the rod end of the electric shift cylinder, install the locknut on the backside and tighten, see Figure 3.



Figure 3

Before adjusting the shift cylinder up and down, make sure the motorcycle transmission is in neutral. While holding onto the electric shift cylinder housing, loosen the two screws on the clamp. Now find the groove in the center of the cylinder shaft. Adjust the cylinder housing up or down so the groove in the shaft is exactly at the plastic bushing, located on the bottom of the cylinder housing, as shown in Figure 4. With the shift cylinder in the correct position, tighten the two bolts of the Pingel clamp.

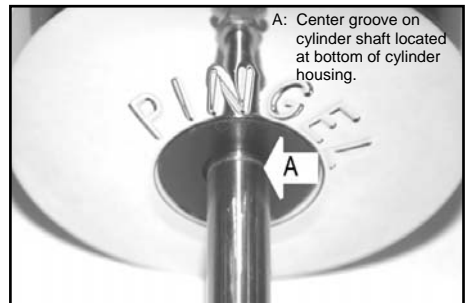


Figure 4

Route the electric cable from electric shift cylinder to the control module, attaching it to the appropriate connector. Secure all wires away from heat and moving parts with wire ties supplied.



Your Electric Speed Shifter kit installation should now be complete. Reconnect negative battery cable. In the interest of safety this is the recommended starting procedure: To arm the electric shifter, make sure the motorcycle is in neutral and pull in the clutch lever, then start the engine. With clutch lever pulled in push either button on the handlebar control and hold it for five seconds; now release the clutch lever slowly (in case the motorcycle is accidentally in gear). The system is now turned on and will shift when button is pressed. When the key is turned off, the power to the control module is disengaged so this procedure must be performed every time the motorcycle is turned back on. Pull in clutch and check shifter movement by pushing either button on the handlebar control.

Test ride motorcycle. If shifting up or down is not achieved, you can loosen the Pingel clamp on the shift cylinder and adjust up or down 1/16" to 1/8" at one time. Retighten Pingel clamp and retest ride motorcycle. When you get final adjustment made, remove and apply thread locker to the end threads of each clamp bolt, but remove only one clamp bolt at a time so as not to lose your adjustment.

Be certain that all of the round connectors are properly coupled and tight. If the motorcycle is not shifting or the kill module is not working, check that these plugs are properly seated and that the internal connector pins are making good contact with their sockets (i.e. no pins are bent).

Note: in the wire harness we have installed one 40-amp fuse for constant power. A spare 40-amp fuse is also supplied.

Prolonged repeated operation of the shifter (actuating the shifter repeatedly in rapid succession beyond normal use) can discharge the motorcycle battery and damage the shift cylinder and/or the control module. The normal battery takes 30-60 minutes to recharge after starting the motorcycle so use the shifter sparingly in this time.

Helpful Operating Tips:

Here is an example of what we found works for us: when upshifting at whatever your shift point RPM is (2000 – 6500) do not drop the RPM to make a shift happen, this will not help. RPM must be kept up to make a shift happen. When traveling at lower speeds, twist the throttle on slightly when hitting the shift button, to make a smoother shift. When downshifting, if you keep the rpm's between 1400-2000 you may be able to downshift without wicking the throttle, just a push of the button. If not, a slight crack of the throttle helps to smoothly go into lower gears. Our testing team has found that downshifting works best when shifting just under the following mph: 4th gear at 40mph, 3rd gear at 30mph, 2nd gear at 20mph and 1st gear at 10mph. Street riding may require the electronic kill module to be set to a longer kill time.

Note: Downshifting on a corner while leaning the bike may cause loss of control.

This unit is not waterproof. Do not subject it to pressure washing or extreme moisture.

Installation of Electric Speed Shifter Kit still maintains OEM Shifting.

If you have any questions please call 608-339-7999

Thank you for purchasing a Pingel Enterprise, Inc. product.

Items included: 2006 H-D VRSCSE V-ROD

- | | |
|--|--|
| 1 - Electronic engine kill module | 2 - ¼-20 x 1" stainless button head socket cap screw |
| 1 - Electric shift cylinder support bracket with cylinder clamp (threaded) | 1 - Electric shift cylinder |
| 1 - Cylinder clamp (thru-holes) | 2 - Ring terminals |
| 2 - 10mm x 1.50mm x 75mm shcs z | 3 - Blue quick tab connector |
| 1 - Fused wiring harness | 10 - Wire ties |
| 1 - 1½" handlebar two piece dual button control assembly | 1 - Tube thread locker |
| 1 - Control module | 1 - 40-amp fuse |
| 1 - ¼"-28 x 1" button head | 1 - Electronic engine kill module |
| 4 - ¼" washer | 1 - Electronic engine kill module wire leads to coil |
| 1 - ¼"-28 half-width locknut | 1 - Pingel shift arm lever |

Dear Valued Customer,

Pingel Enterprise, Inc. would like to take this opportunity to thank you for purchasing one of our Electric Speed Shifter Kits.

We would also like to know what you think of the product and how your installation went. Your assistance can help us overcome any technical issues that other installers may experience. You can reach us toll free at 1-888-474-6435 or email us at info@pingelonline.com.

We are also requesting photos of your installation. Your photos may be selected for publication in the Pingel catalog or at www.pingelonline.com. Photos may be submitted by emailing them to info@pingelonline.com. When submitting a photo, please include the motorcycle model and year.

Thank you again for your purchase!

LIMITED WARRANTIES/LIABILITIES

Pingel Enterprise, Inc. assumes no responsibility or liability for damage or injury of any kind arising out of the use or misuse of any products. Pingel Enterprise, Inc.'s sole responsibilities with respect to products sold are to provide the following limited warranty:

Pingel Products: Pingel Enterprise, Inc. warrants to the original purchaser that the product shall be free from defects in parts and workmanship under normal use for 30 days from date of purchase. Pingel Enterprise, Inc.'s obligation under this warranty is limited to the repair or replacement of any part found to be defective when returned postpaid to the factory. The product must be returned with evidence of date and place of purchase, and detailed description of the problem. The warranty will not apply if the product has been installed incorrectly, repaired, or damaged by modification, misuse, negligence or accident. The repair or replacement of such part, as needed, is your sole and exclusive remedy. No refunds will be given. Pingel Enterprise, Inc. makes no other warranty, expressed or implied with respect to its products and specifically disclaims any implied warranties of merchantability or fitness of any product for a particular purpose and except as herewith stated assumes no liability with respect to the product.

Dispute Resolution: All disputes, claims or controversies of any kind that may arise between you and Pingel Enterprise, Inc. shall be brought in the state court located in Adams County, Wisconsin. You agree that the sole venue and jurisdiction for such disputes shall be the above named court and hereby submit to the jurisdiction of that court.

THANK YOU for purchasing a PINGEL ENTERPRISE, INC., product. View our entire product line at www.pingelonline.com

